



Range of Enclosures

KRONECTION® Box I, II, III

Short survey of the KRONECTION® Box I, II, III

The KRONECTION Box series of housings (Box I, II and III) consists of a plastic housing available in three different sizes. Attachment frames are available for increasing the mounting depth and flush mounting frames are also available.


The housing contains all the important aids required for mounting as well as a fixing hole pattern which not only permits the fitting of various connection elements from the KRONE range of products, but also enables the fitting of other equipment. In order to provide better access during assembly, the box frame can be detached from the base plate of the housing. The lid of the box is available either with a turnbuckle or cylinder lock. When necessary, a microswitch can be fitted as a door contact.

The KRONECTION Boxes I, II and III are supplied either as empty housings or as distributor boxes equipped with LSA-PLUS quick connection components.


Technical specifications

Materials


Housing:	Polystyrene Colour: grey RAL 7035
Flammability:	According to UL 94 V-O
Protection:	IP 30 according to DIN 40 050
Climate range:	For dry and damp rooms (determined only by the equipment fitted)
Ambient temperature during storage:	-50°C ... +54°C
during operation:	-20°C ... +65°C
Gas and salt mist test:	No influence

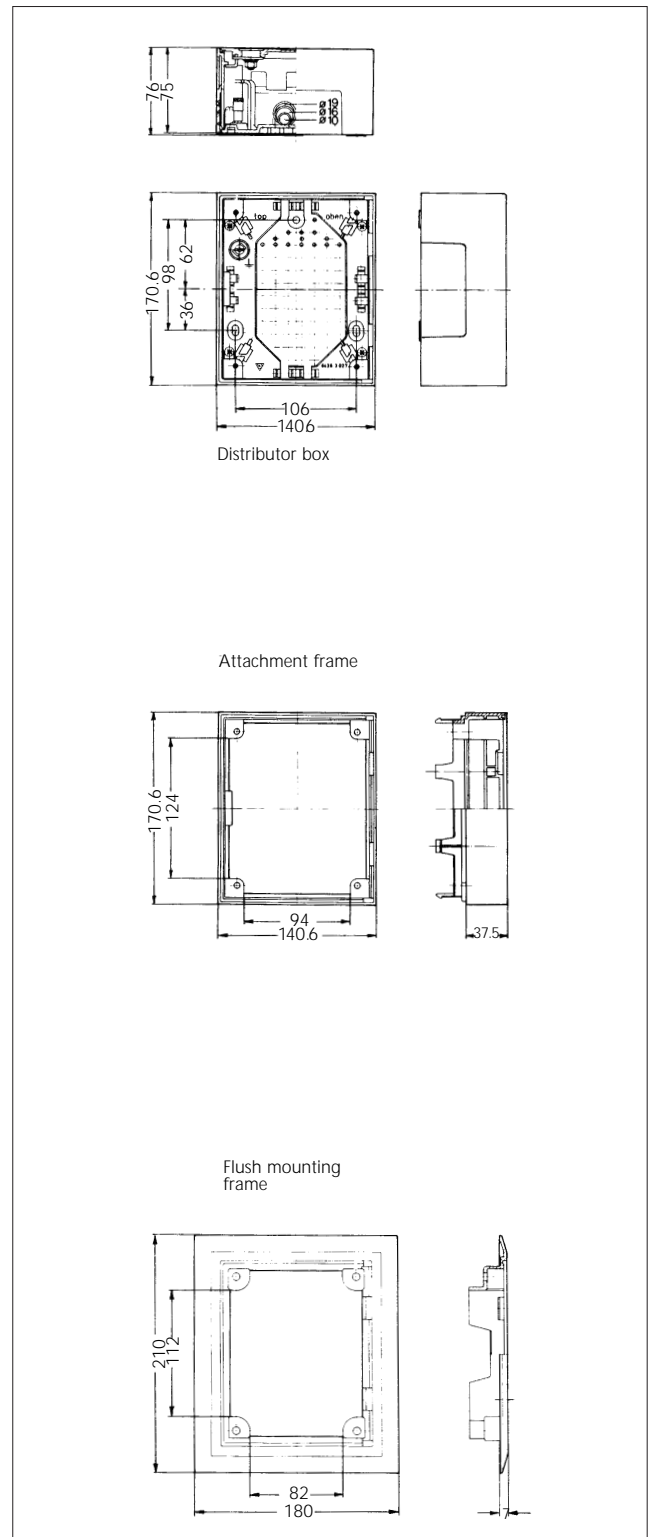

KRONECTION Box I for 30 pairs max.

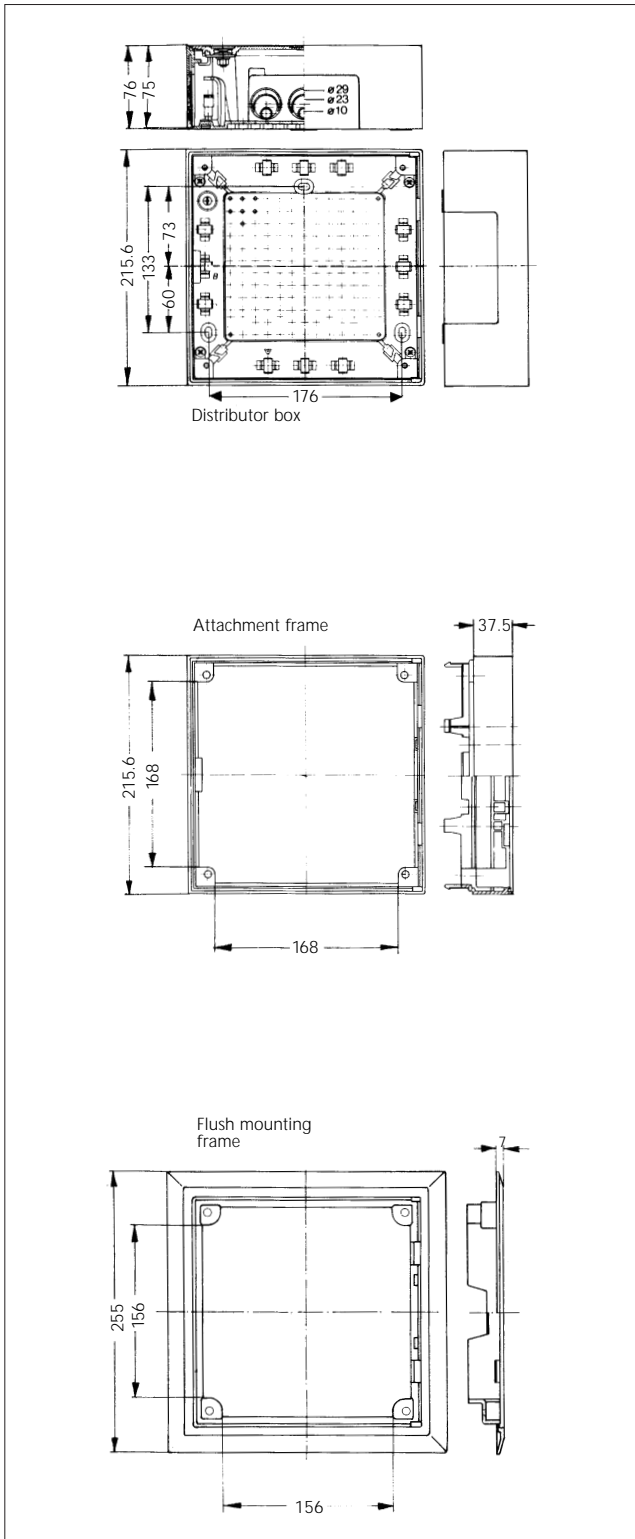

KRONECTION Box II for 50 pairs max.

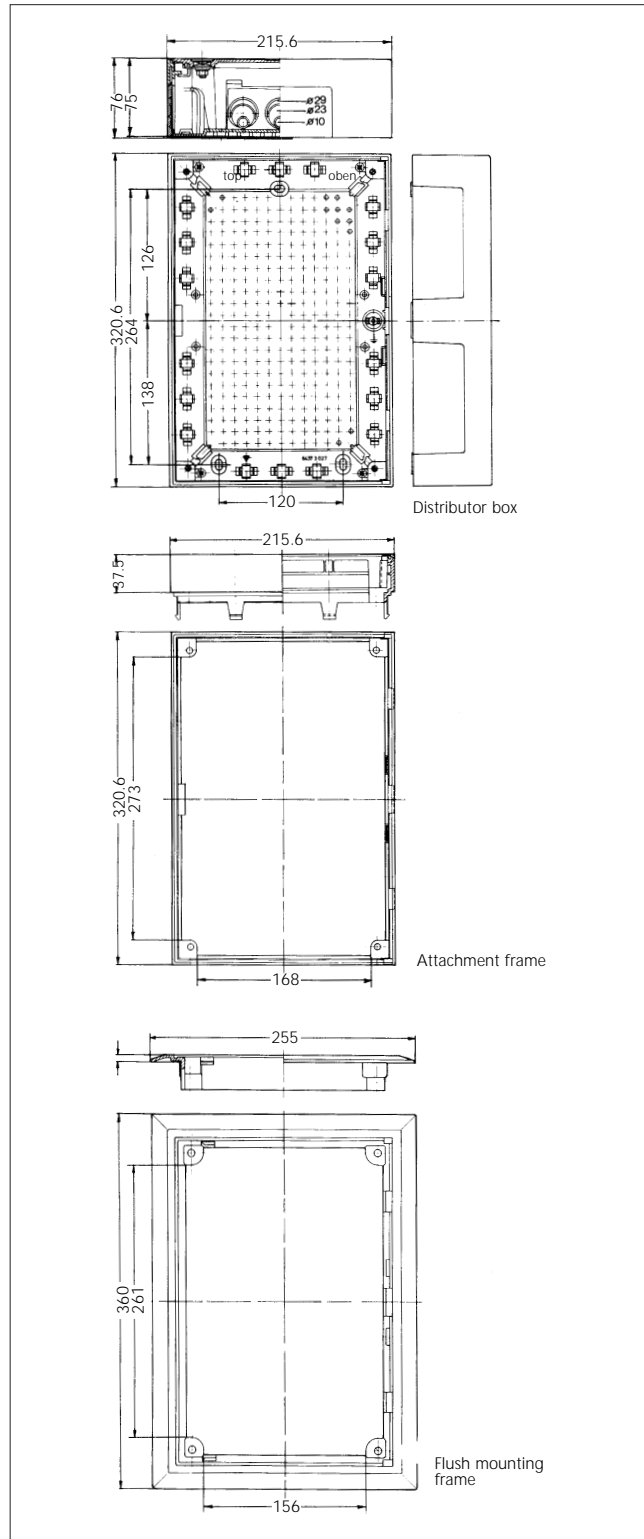

KRONECTION Box III for 100 pairs max.